History of the Potsdam, Seddin and Niemegk Geomagnetic Observatories – Second Part: Seddin

3

4 Hans-Joachim Linthe¹

5 [1] {Helmholtz Centre Potsdam GFZ German Research Centre for Geosciences, Potsdam,6 Germany}

7 Correspondence to: H.-J. Linthe (linthe@gfz-potsdam.de)

8

9 Abstract

10 The measurement series of the 3 geomagnetic observatories Potsdam, Seddin and Niemegk 11 span over 130 years, starting in 1890. It is one of the longest, almost uninterrupted series of 12 recordings of the Earth's magnetic field. Data users frequently emphasize the high quality of 13 the data and its significance for geomagnetic base research. Very well-known outstanding geomagnetism scientists as Max Eschenhagen, Adolf Schmidt, Julius Bartels, Gerhard 14 Fanselau and Horst Wiese directed the observatories during their existence. This paper 15 16 describes the history of the Seddin Observatory, which was in operation from 1907 until 1932. 17

18 **1** Introduction

19 The magnetic observatory of the Potsdam Prussian Meteorological-Magnetic Observatory 20 was in operation since 1890 on the Telegrafenberg near by the town of Potsdam. In 1904 the 21 town of Potsdam planned the electrification of the Potsdam horse tramway. Similarly, for the 22 nearby Teltow Canal, constructed 1900-1906, a towing by electrical locomotives was 23 intended to be used. Due to running both the rail establishments by DC leakage earth current 24 influences on the magnetic observations seemed to be inevitable. The movement of the Potsdam Observatory became indispensable (Schmidt, 1910). It was decided to establish an 25 26 additional station for variometer recordings at a location in secure distance to the DC powered 27 railway traction vehicles (Linthe, 2022).

1 **2.** Seddin Magnetic Observatory

Test recordings 13 km south of Potsdam near by the village of Seddin, performed June-December 1906 (Venske, 1909), proved the applicability of the location for a sub-observatory free of technical noise, which was established approximately 180 m northward of the Seddin Lake and 250 m westward of the road Potsdam - Beelitz. Its operation started in 1907. Adolf Schmidt successfully acquired the funding for the sub-observatory from the Teltow Canal Society.

8 2.1 Seddin Magnetic Observatory Buildings

9 Fig. 1 shows the ground plan of the Seddin observatory. The compound was a rectangular, 10 fenced area of about 150 m by 130 m (Schmidt, 1908). A massive house containing two 11 offices and two accommodation rooms was constructed near by the South-Eastern corner of 12 the compound for service. Fig. 2 shows its photo.

The ordinary observatory building was located slightly displaced in North-West direction from the centre of the compound. The wooden building rested on a basement made from nonmagnetic limestone. The pillars for the instruments consist of the same material as the basement. Any fitting assemblies are made from brass, the nails are copper ones. Fig. 3 shows a photo of the observatory building.

At Fig. 4 the ground plan of the observatory building is depicted. The building is oriented geographically. The circumferential corridor (Umgang) protects the instrument rooms from outside temperature variations. The loft and the big projection of the roof shields the walls from solar radiation (see Fig. 3).

22 The photographic recording equipment (Reg.-App.) was to be handled from the vestibule (Vorraum). Its sketch is shown at Fig. 6. Two instrument rooms are available. The 23 instruments for the current observations of the declination (D), vertical intensity (Z), North 24 25 (X) and East component (Y) were placed on separate pillars in the Northern room. In the 26 Southern room a horseshoe-shaped table, resting on several pillars, was available for 27 temporary placement of portable precise instruments. The building did not have any heating. 28 In a distance of 15 m from the building in Northern direction a pillar for absolute 29 measurements was constructed.

From the beginning it was intended to construct a building for absolute measurements.
 Negotiations with the town of Potsdam to provide the necessary funding seemed to result in a
 successful result in 1913, but the begin of World War I blocked this plan.

In 1925 the service house was enlarged, a small store shed and a wooden house of 5.8 m by 4.3 m floor space and 5 m height for absolute measurements were constructed. The former outdoors pillar was encased by the absolute house and a second pillar inside was added (Venske, 1927). Absolute measurements were performed in August 1926 and from July 1928 onward in this house. An azimuth mark target was fixed at the service house. The azimuth value was determined by means of solar observations.

After the termination of the observations in Seddin from 12 May 1932 onward both wooden observatory buildings were removed, transported to Niemegk and rebuild at the location of the new observatory (Nippoldt, 1933 and 1934). Unfortunately any photo of the absolute hut at its original location does not exist. Fig. 5 shows a photo of the "small hut" at its present location in Niemegk. This photo was taken in 2005 after a comprehensive renovation.

15 The service house still exists. It was handed over to the forestry administration.

16 **2.2 Observatory Instruments**

As already mentioned, Seddin observatory was mainly in use to record the variations of the Earth's magnetic field. Due to the termination of the observations in Potsdam in 1928 the absolute measurement instrument set was moved to Seddin.

20 2.2.1 Variation Recordings

The recording equipment had 4 drums for recording the variations of the declination (D), North component (X), East component (Y) and vertical intensity (Z), driven by a joint clockwork. It was installed in the wall between the vestibule and the instrument room (see Fig. 6). So any handling of it, as the change of the photographic paper, was possible without entering the instrument room. X, Y and Z were recorded generally, D only occasionally. Two petrol burning lamps (one for X, Y and Z; the other one for D) produced the recording light.

The variations of the two horizontal components X and Y were recorded by means of identical magnetometers, based on suspended magnets, while the vertical variation was recorded using a magnet mounted on a balance. Fig. 7 shows views of a horizontal magnetometer (left) and the vertical one (right). The Helmholtz coils mounted at each magnetometer allow the galvanic determination of the scale values. The magnetometers and
the recording equipment were made by the well-respected enterprise Otto Toepfer & Sohn,
Potsdam.

The Seddin photographic recordings of each component contain a baseline, 2 tracks of different projected sensitivities: 2 nT per mm and 8 nT per mm and the temperature track. Hourly the baseline was interrupted for 3 minutes as time marks, controlled by a nonmagnetic pendulum clock. The 2 tracks of different sensitivity ensure the acquisition of the variations of the Earth's magnetic field in case of lower or higher magnetic activity (Schmidt, 1910). Fig. 8 shows the photographic recordings of the North (X), East (Y) and vertical component (Z) of 7 February 1908 8 o'clock till 8 February 1908 8 o'clock.

The instruments and recording equipment, operated in the South room, were changed from time to time. An instrument set of decreased sensitivity allowed the depiction of the magnetic variations in case of magnetic storms at the usually used photographic paper. In 1928 finally a variometer set was installed for recording of the declination (D) and the horizontal (H) and vertical intensity (Z), made by Askania, Berlin¹ and a photographic recording equipment, made by Otto Toepfer & Sohn², Potsdam as backup system.

17 2.2.2 Absolute Measurements

18 Absolute measurements took place in 1908 at the outdoors pillar and in August 1926 at the 2 19 pillars in the new absolute house by means of a set of journey instruments to compare the absolute levels of Potsdam and Seddin observatory. In 1928 theodolite Wanschaff was 20 21 installed on one of the 2 pillars and the associated oscillation box found its place on a wooden tripod in the absolute house for the further measurements of D and H in Seddin. The Earth 22 inductor Schulze No. 65^2 , installed at the other pillar, was in use for the measurements of the 23 24 inclination (Nippoldt, 1931). From the begin of the year 1930 the Earth inductor Schulze No. 1 was moved from Potsdam to replace the one No. 65 in Seddin. 25

26 **2.3 Operation of the Seddin Observatory**

The Seddin variometer recordings were used from 1 January 1908 onward for the data processing. The absolute measurements were further performed in Potsdam. The transformation of their results on Seddin was done by means of comparison of simultaneous

¹ see Appendix in Linthe (2022)

² see Appendix after section 2.3.2

recordings of the 2 stations during 2 night-hours of all magnetically quiet days (Schmidt, 1910). Occasionally absolute measurements were performed on the outdoors pillar. The change of the photographic paper and the petrol lamps was done regularly by an employee of the forestry administration. From 1920 onward an observatory-employed caretaker took over all the technical Seddin duties, living with his family in the service house.

6 The photographic paper was transported to Potsdam observatory for its development. The 7 scientific and technical staff of Potsdam observatory had to travel to the Seddin station in case 8 of any maintenance necessities. The data processing was done as described for the Potsdam 9 observatory (Linthe, 2022). The observatory data were published regularly in the yearbooks. 10 For the time period 1908-1927 the data of the 2 observatories Potsdam and Seddin were 11 regularly published together in the yearbooks.

12 Since the beginning hourly values were published in the yearbooks. Cost cuts due to war 13 forced to skip these tables from 1917 onward. This practice was continued until the closure of 14 Seddin observatory in 1931. The hourly values of this time interval were only published later 15 in 1959 (Fanselau, 1959).

16 **2.3.1 Operational Problems and Termination**

Around 1925 plans to electrify the Berlin suburban railway system by DC came to the public.
It was further planned to enlarge the network to Potsdam main station. It became clear that the
future of the Potsdam and Seddin observatories were at risk. The noise on the observations at
Potsdam caused by the leakage currents was expected to be as strong to force its termination.
Even Seddin came into risk to be disturbed in future in case of further enlargement of the
Berlin suburban railway system. Such plans were under discussion (Nippoldt, 1929).

The railway company carried out a first test run of an electrical train on 24 April 1928. Fig. 9 shows its influence on the Potsdam variation recordings. That shows clearly that the fears of the observatory authorities were not without any reason. The shutdown of the Potsdam observations became inevitable with the opening of the regular operation of the electrical trains.

The only chance for a continuation of magnetic observations was to move the observatory to a location free of anthropogenic noise, if possible for all the time, but not too far away from Potsdam, remaining the processing centre. Before and after going retired on 1 October 1928 Adolf Schmidt was occupied to find a suitable place for the new observatory. He found a

1 promising location near by the small town of Niemegk in the region of Hoher Fläming, but 2 the observatory construction started only in 1929. The regular electrical operation of the Berlin suburban railway started already on 11 June 1928, including runs to Potsdam main 3 station. It became necessary to move the absolute measurements in a big hurry from Potsdam 4 5 to Seddin. Fig. 10 shows the influence of the leakage currents on the Potsdam recordings, as an example of the night hours of 27 October 1928. Only during the daily shutdown of the 6 7 railway service from 01:30 till 03:00 (Greenwich civil mean time) the recordings were 8 undisturbed. The noise on the recordings during the remaining time interval was forbiddingly 9 high that the observations in Potsdam were finished finally on 17 May 1929.

10 Fig. 11 shows the influence of the electric trains of the Berlin suburban railways on the 11 Seddin recordings of the time interval 26 October 1928 11 p.m. till 27 October 1928 7 a.m. 12 (Greenwich civil mean time). The noise caused by the leakage currents is smaller than on the Potsdam Observatory, but clearly visible. Such disturbed recordings are not permanently 13 14 acceptable. It was necessary to construct as soon as possible the new Niemegk Observatory. 15 Only in the course of 1931 the new observatory became functioning. In fact it was intended to 16 operate the Seddin and Niemegk observatories for a suitable time in parallel to ensure a 17 smooth changeover. The time period of only 1 year provided this opportunity. On 9 May 1932 18 the last absolute measurements took place in Seddin, On the next day the variometer 19 recordings were terminated (Nippoldt, 1933).

20 **2.3.2** Affiliation and Directors of the Observatory

21 The Seddin Observatory was affiliated during its complete existence to the magnetic 22 department of the Magnetic-Meteorological Observatory Potsdam of the Royal Prussian 23 Meteorological Institute Berlin. The institute was renamed in 1919 into "Prussian 24 Meteorological Institute Berlin".

Adolf Schmidt (1860-1944) became the director of the Potsdam observatory in 1902. He kept
the director's position until his retirement on 1 October 1928. Alfred Nippoldt (1874-1936)
took over his position. The portraits of both persons can be found in Linthe (2022).

28

29 Appendix: Instrument Maker Related to the Observatory

30 **Otto Toepfer (1845–1914)** founded in Potsdam his mechanical workshop in 1873. He 31 constructed scientific instruments for different Potsdam institutes. In 1896 Otto Toepfer 1 handed over the supervision of the company to his son **Reinhold Toepfer (1873–1951).** Due

2 to financial problems the company was taken over in 1919 into **Carl Bamberg**'s workshops

3 for precision mechanics and optics, which was renamed in 1921 as Askania AG.

4 The Seddin observatory further purchased instruments from the mechanical workshop owned

5 by Gustav Schulze, Potsdam. Unfortunately information about this company could not be
6 found.

7 Acknowledgements

8 Kristian Schlegel strongly encouraged me to write this paper. I am very thankful to him for 9 his patience. I further thank the Helmholtz Centre Potsdam GFZ German Research Centre for 10 Geosciences, which rendered possible to write the paper using its resources. I am especially 11 thankful to Jürgen Matzka, group leader Geomagnetic Observatories of the Geomagnetism 12 Section of the GFZ, for giving me the opportunity to work at the Niemegk Adolf Schmidt 13 Geomagnetic Observatory. Since my official retirement end of 2014 I had the chance to use 14 an office, a computer and all the observatory publications to collect the necessary information. 15

16 **Competing Interests**

17 I declare that I have no conflict of interest.

1 References

Bock, R.: Ergebnisse der Magnetischen Beobachtungen im Adolf-Schmidt-Observatorium für
Erdmagnetismus Niemegk im Jahre 1934, pp. 1-36, Magnetisches Observatorium der
Universität Berlin in Potsdam, Julius Springer, Berlin 1937


Fanselau, G.: Ergebnisse der magnetischen Beobachtungen am Observatorium Seddin –
Niemegk, Zusammenfassung bisher noch nicht veröffentlichter Tabellen der
Stundenmittelwerte für die Jahre 1917 bis 1931 und 1934, Deutsche Akademie der
Wissenschaften zu Berlin, Geomagnetisches Institut Potsdam, Akademie-Verlag Berlin, 1959

9 Linthe, H.-J.: History of the Potsdam, Seddin and Niemegk Geomagnetic Observatories –
10 First Part: Potsdam, History of Geo- and Space Sciences, submitted 2022

11 Nippoldt, A.: Verlegung der magnetischen Observatorien von Potsdam und Seddin wegen 12 Vorortbahnen. Elektrisierung der Bericht über die Tätigkeit des Preußischen Veröffentlichung Meteorologischen Instituts Jahre 1928. 13 im des Preußischen Meteorologischen Instituts Nr. 362, S. 52-60, Berlin, 1929 14

- Nippoldt, A.: Ergebnisse der magnetischen Beobachtungen in Potsdam und Seddin im Jahre
 16 1929, pp. 3-35, Veröffentlichungen des Preußischen Meteorologischen Instituts Nr. 383,
 17 Julius Springer, Berlin, 1931
- Nippoldt, A.: Magnetische Arbeiten, In: Bericht über die Tätigkeit des Preußischen
 Meteorologischen Instituts im Jahre 1932 erstattet vom Direktor, pp. 44-49, Veröffentlichung
 des Preußischen Meteorologischen Instituts Nr. 395, Julius Springer Berlin, 1933
- Nippoldt, A.: Ergebnisse der magnetischen Beobachtungen in Potsdam und Seddin im Jahre
 1931, pp. 3-52, Magnetisches Observatorium der Universität Berlin in Potsdam-Niemegk,
 Julius Springer, Berlin, 1934
- Schmidt, A.: Ergebnisse der magnetischen Beobachtungen des Observatoriums in Potsdam im
 Jahre 1905, pp. 1-82, Veröffentlichungen des Königlich Preußischen Meteorologischen
 Instituts Nr. 196, Behrend & Co., Berlin, 1908
- Schmidt, A.: Ergebnisse der magnetischen Beobachtungen des Observatoriums in Potsdam
 und Seddin im Jahre 1908, pp. 1-97, Veröffentlichungen des Königlich Preußischen
 Meteorologischen Instituts Nr. 225, Behrend & Co., Berlin, 1910

- 1 Venske, O.: Die Registrierungen an der Hülfsstation bei Seddin, pp. 19-25, Ergebnisse der
- 2 magnetischen Beobachtungen in Potsdam im Jahre 1906, Veröffentlichungen des Königlich
- 3 Preußischen Meteorologischen Instituts Nr. 211, Behrend & Co., Berlin, 1909
- 4 Venske, O.: Arbeiten und Beobachtungen in Seddin, pp. 10-14, Ergebnisse der magnetischen
- 5 Beobachtungen in Potsdam und Seddin im Jahre 1925, Veröffentlichungen des Preußischen
- 6 Meteorologischen Instituts Nr. 351, Julius Springer, Berlin, 1927

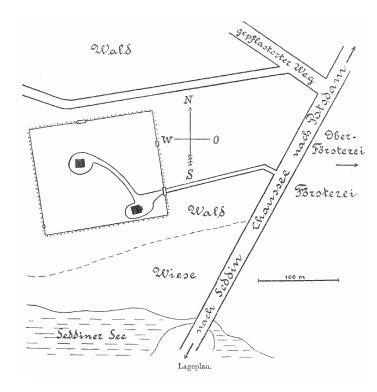

- 2 Fig. 1. Sketch of the Seddin observatory compound. Source: Schmidt, 1910.




- 5 Fig. 2. Seddin Observatory service house. Source: Helmholtz Centre Potsdam GFZ




3

2 Fig. 3. Photo of the Seddin observatory building. Source: Helmholtz Centre Potsdam – GFZ.

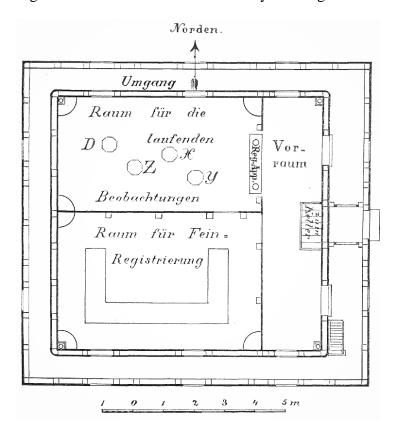

4 Fig. 4. Ground plan of the Seddin Observatory building. Source: Schmidt, 1910.

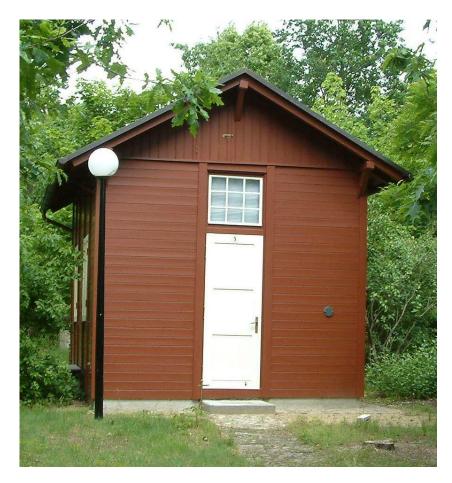

- 2 Fig. 5 Absolute hut of Seddin observatory after its movement to the present location in
- 3 Niemegk and renovation in 2005


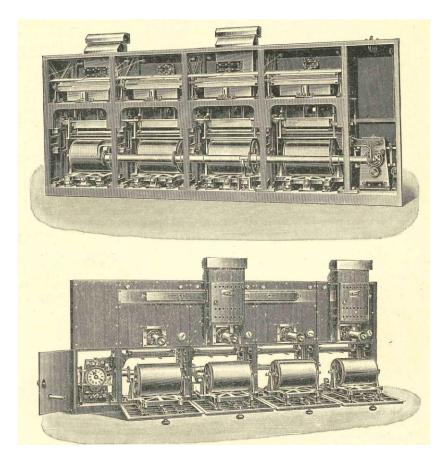


Fig. 6. Recording equipment of the observatory building North room. View from the
instrument room (up) and view from the vestibule (down). Source: Schmidt, 1910.

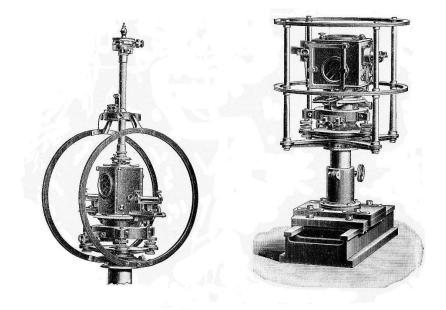

6 Fig. 7. Upper part of a horizontal magnetometer (left) and the vertical one (right). Source:7 Schmidt, 1910.

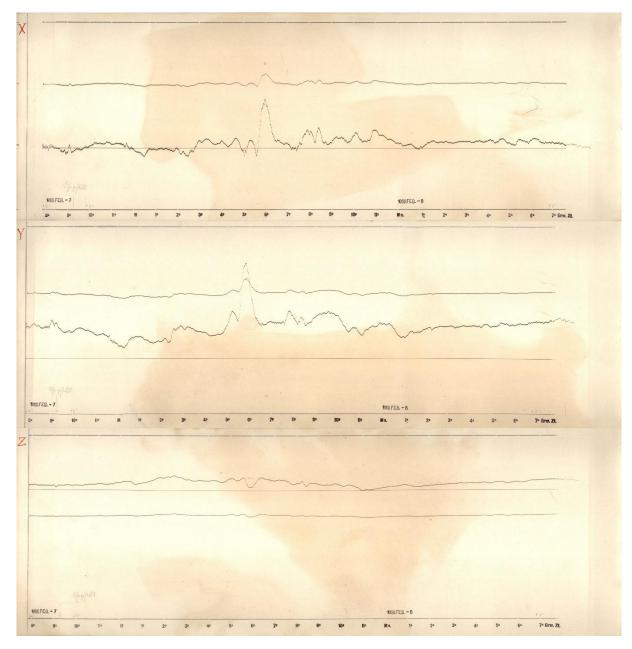


Fig. 8. Seddin Observatory photographic recordings of the North (top), East (middle) and
vertical component (bottom) of the time interval 7 February 1908 8 a.m. till 8 February 1908
8 a.m. (Greenwich civil mean time). Source: Helmholtz Centre Potsdam - GFZ

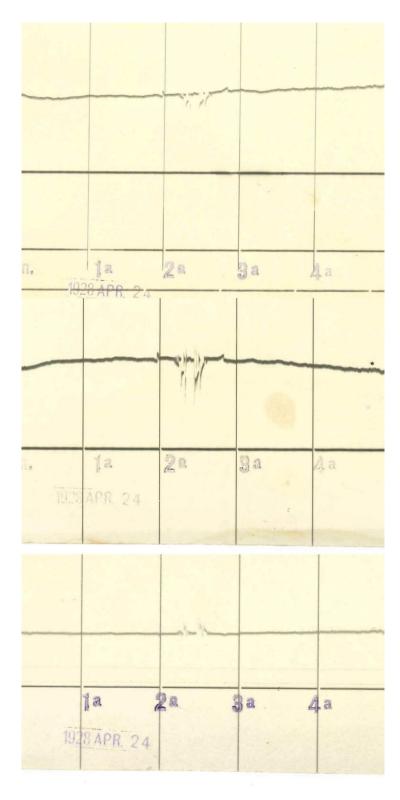


Fig. 9. Potsdam Observatory photographic recordings of the horizontal intensity (top),
declination (middle) and vertical intensity (bottom) of the time interval 23 April 1928 12 p.m.
till 24 April 1928 5 a.m. (Greenwich civil mean time) showing the disturbing effect of the
first electrical train of the Berlin suburban railway. Source: Helmholtz Centre Potsdam –
GFZ.

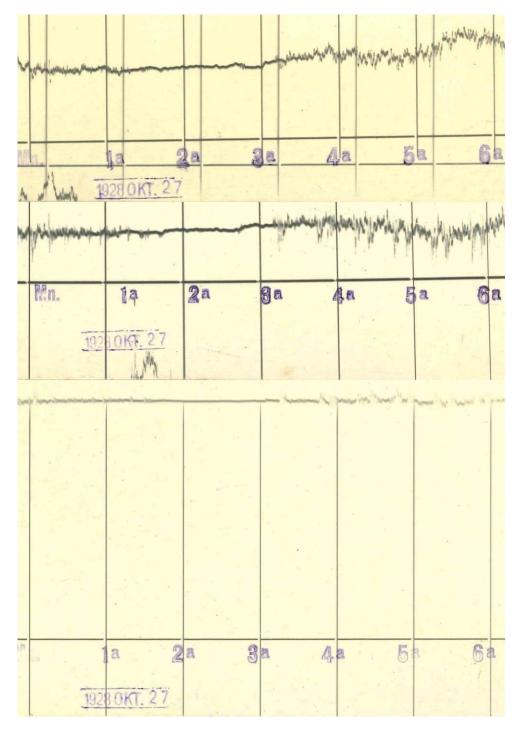


Fig. 10. Potsdam Observatory photographic recordings of the horizontal intensity (top),
declination (middle) and vertical intensity (bottom) of the time interval 26 October 1928 12
p.m. till 27 October 1928 6 a.m. (Greenwich civil mean time) showing the disturbing effect of
the Berlin suburban railway service. Source: Helmholtz Centre Potsdam – GFZ.

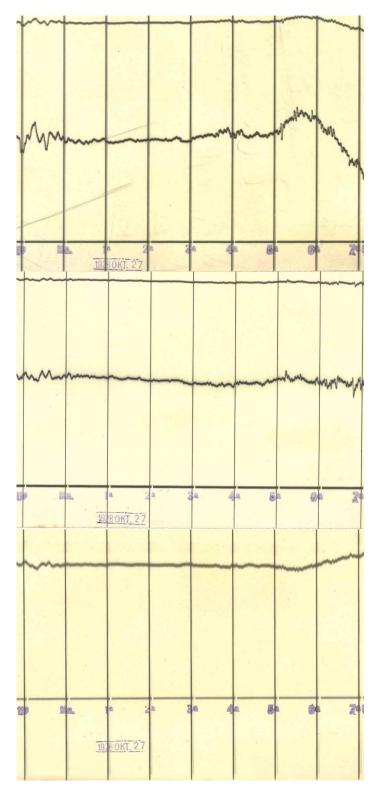


Fig. 11. Seddin Observatory photographic recordings of the North (top), East (middle) and
vertical component (bottom) of the time interval 26 October 1928 11 p.m. till 27 October
1928 7 a.m. (Greenwich civil mean time) showing the disturbing effect of the Berlin suburban
railway service. Source: Helmholtz Centre Potsdam – GFZ.