

# The Role of Point Discharge in the Historical Development of Atmospheric Electricity

Blair P. S. McGinness<sup>1</sup>, R. Giles Harrison<sup>1</sup>, Karen L. Aplin<sup>2</sup>, and Martin W. Airey<sup>1</sup>

<sup>1</sup>Department of Meteorology, Earley Gate, University of Reading, Reading, RG6 6ET, UK

<sup>2</sup>Queens Building, University Walk, Bristol BS8 1TR, UK

**Correspondence:** Blair P. S. McGinness (blair.mcginness@reading.ac.uk)

**Abstract.** Point discharge, like lightning, is an atmospheric electricity process which has been observed directly and indirectly for centuries. Point discharge occurs when an electric field is enhanced at a point, causing local ionisation of the air and allowing a current to flow between the object and atmosphere. Point discharge sensors are simple instruments which measure the discharge currents caused by enhancements of the atmospheric electric field. In the early 20th Century, several milestone atmospheric electricity investigations were performed which employed the effects of naturally occurring point discharge currents and the measurements made by point discharge sensors. Point discharge was central to some of the arguments made in the proposal of the global atmospheric electric circuit, and the early evidence that was found to support this model. Point discharge sensors continued to be used throughout the 20th and 21st centuries, with understanding of their operations being developed further in this time.

## 10 1 Introduction

Through dramatic processes, such as lightning strikes, it can be said that atmospheric electricity has been observed for all of human existence (Schlegel, 2024). The understanding of these processes developed more recently, however, with the conceptual picture of the global atmospheric electric circuit being proposed in the early 20th Century. Central to many of the investigations driving this understanding was the process of point discharge. This occurs naturally, acting as an important current flow in the global atmospheric electric circuit, but dedicated point discharge sensors can also be used as atmospheric electricity instruments.

Point discharge occurs when an electric field is enhanced at the tip of a sharp point. The local enhancement of the electric field at these points leads to the air becoming ionised via charged particle collisions. This region of ionisation then allows a current to flow between the object and the surrounding air, referred to as a corona discharge or point discharge current (PDC). These currents can sometimes lead to a glow visible to the naked eye.


Through this visible glow, the process of point discharge has long been observed. In the 1st Century BCE, De Bello Africo, attributed to Julius Caesar, described an occurrence of the phenomenon as the tips of spears “spontaneously caught fire” (Caesar, c.40 BCE [1955]). In the 1st Century CE, Pliny the Elder described his understanding of the phenomenon, stating that there was a “luminous appearance” which occasionally attached to javelins and parts of ships (Pliny the Elder, 77 [1855]). Similarly

25 to many early lightning observations, these reports predate understanding of the electrical nature of the point discharge process,  
instead attributing it to the work of the gods. Many more observations of the phenomenon have occurred since, with it often  
being observed on the masts of ships (Von Engel, 1965; Chalmers, 1967; Wescott et al., 1996). The associations with ships,  
along with ~~it's~~its flame-like appearance, have led to the visual phenomenon being named “St. Elmo’s fire” after the patron  
saint of sailors, St. Elmo (Perkins, 1979; Wescott et al., 1996). St. Elmo’s fire has also been observed to occur from sharp tips  
30 on aircraft (Wescott et al., 1996; Mulvey et al., 2017).

In the 18th century, several investigations identified the presence of electrical charge in the atmosphere. These discoveries are  
best known through Benjamin Franklin’s “kite experiment”, which was able to draw sparks from a kite flying in a thunderstorm  
(Franklin, 1752). At similar times to this experiment, however, other investigations showed that electrical charge was present  
in the atmosphere in fair weather conditions (Le Monnier, 1952; Canton, 1753; Mazeas and Parsons, 1753). By identifying  
35 the presence of electricity in the atmosphere, these investigations were a fundamental step towards our current understanding  
of atmospheric electricity. Franklin is also known for his work investigating lightning rods. As noted in his minutes dated  
November 7 1749, Franklin suggested that St Elmo’s fire would be able to be produced from “electrical fire” being drawn from  
a cloud into a lightning rod (Van Doren, 1938). The identification that St. Elmo’s fire is electrical in nature was a significant  
development in our understanding of the phenomenon.

40 The process of point discharge can be used to investigate the local atmospheric electric field. The polarity and magnitude of  
a discharge current are dependent on the properties of the electric field inducing the current. Varying conventions are used to  
describe the polarity of point discharge currents; a common convention describes the polarity of a conventional current flowing  
out of a discharge point (so a positive current would involve a flow of electrons towards the discharge point). Point discharge  
sensors are instruments designed such that they have a sharp point which enhances the atmospheric electric field and causes  
45 point discharge to occur. This discharge current is then recorded by a meter. An example of a point discharge sensor deployed  
at the Reading University Atmospheric Observatory is shown in Fig. 1. To relate the point discharge measurement from such a  
sensor into an observation of the atmospheric electric field, it is important to have a description of the operation and geometry  
of the sensor. A history of various parametrisations that were developed for PDC sensors is given in Sect. 4. Point discharge  
sensors are typically very simple devices, giving them numerous advantages over more complicated atmospheric electricity  
50 instruments, such as field mills. These advantages will be considered further in Sect. 3.4.

Point discharge has been important to many atmospheric electricity investigations performed in the 20th and 21st centuries.  
PDC sensors have been used in a range of capacities, from taking observations of the potential gradient (PG), i.e. the negative  
of the electric field, to making estimates of the vertical current flow at a given location. Arguments involving the effects of nat-  
urally occurring point discharge currents have also been made, without direct use of point discharge sensors. In addition to their  
55 usage in historical investigations, point discharge sensors continue to be used as atmospheric electricity instruments. Modern  
understanding of these sensors may allow some historical data to be reanalysed. Consequently, there is a clear motivation to  
have a documented account of the history of investigations involving point discharge. In recent years there has been increasing  
interest in the history of atmospheric electricity, including recovering measurements (e.g. Harrison and Schlegel (2023)), and

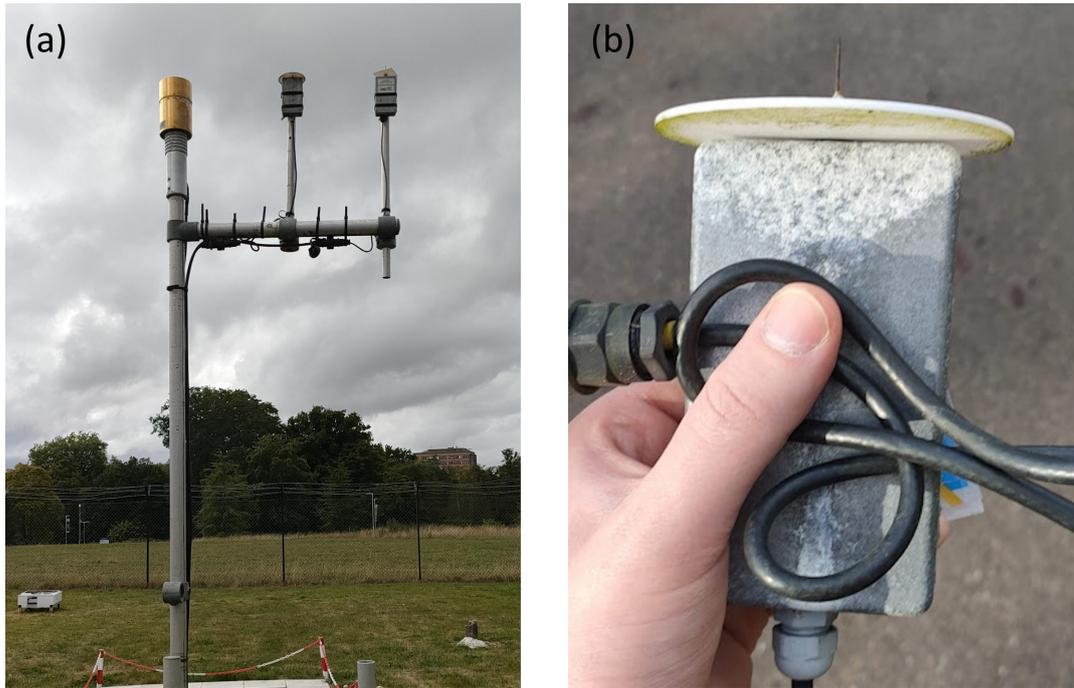

**Figure 1.** Photographs of point discharge sensors deployed at the Reading University Atmospheric Observatory. (a) shows the top of a 3m tall mast, with three atmospheric electricity sensing devices mounted on it. The leftmost of these devices is a Chubb JCI 131 field mill, with the two rightmost devices being point discharge sensors. [The design of the leftmost point discharge sensor is described by Marlton et al. \(2013\)](#). (b) shows a close up view of ~~one of these~~ this point discharge ~~sensors~~ sensor. This photo was taken following the sensor being deployed in the field site for at least 3 years, and some weathering is visible on the device; in particular, the sharp point at the tip of the sensor is showing visible rusting. Despite this weathering, the point discharge device was continuing to work well in this deployment.

[the operation of past observatories \(e.g. Nagamachi et al. \(2023\); Harrison and Riddick \(2024\)\), to which this paper brings a specific consideration to historical investigations involving point discharge.](#)

A history of several of the investigations featuring point discharge are described in the subsequent sections, first considering several investigations important to the development of key atmospheric electricity concepts from the 20th Century, then considering a number of subsequent investigations, and finally several investigations which furthered the understanding of the operation of PDC sensors.

## 2 Atmospheric electricity in the early 20th century

By the early 20th Century, there had been a great advancement in the knowledge of atmospheric electricity. It was known that the surface of the Earth was negatively charged with respect to the atmosphere, with further observations that the PG at the surface was typically positive (Exner, 1900). Further, it was known that a charged conductor in the air would lose this charge

through dissipation in a manner consistent with the air being conductive, and it had been observed that ions were present in the atmosphere (Exner, 1901; Wilson, 1901). These results together introduced a problem, however. Given that the atmosphere was conductive, the charge held by the Earth should dissipate readily, as for other charged conductors in air. A further uncertainty was present regarding the charge structure of thunderclouds, despite their electrical nature having been known for a substantial time. Finally, there was uncertainty regarding the polarity of charge carried by precipitation. Elster and Hans had developed instrumentation for observing the charge on rain droplets, and carried out several observations showing that various types of precipitation typically carried large electric charges, however a solid understanding of the polarity of this precipitation was not yet held (Elster and Hans, 1888, 1899; Exner, 1901; Simpson, 1909).

To explain why the charge of the Earth was persistent, several theories were considered: It was suggested that as negative ions in air were more mobile than positive ions, the Earth would undergo collisions with them more readily and would become negatively charged, while the air becomes positive (Exner, 1901; Wilson, 1903). Alternatively, it was suggested that electrons emitted by the Sun could pass through the atmosphere, colliding with the surface of the Earth, causing it to acquire a negative charge (Wilson, 1903). Another suggestion, which started the journey towards the conception of the global atmospheric electric circuit model was that in fair weather conditions the positive PG would lead to a conduction current which acted to dissipate the negative charge of the Earth; however, in areas of precipitation a negative charge would be brought down by charged rains, restoring the Earth's negative charge (Wilson, 1903).

~~In~~ It was stated by Wilson (1906) that in order to judge various atmospheric electricity theories it would be necessary to have measurements of the conduction current between the atmosphere and Earth at various locations. Wilson further noted that it would be greatly desirable to have simultaneous observations of the charge brought down by precipitation, no doubt in an attempt to verify his theory that precipitation caused the Earth to charge negatively. To facilitate these measurements, several experiments testing a method of observing the conduction current were reported by Wilson (1906, 1908).

Observations on the charge carried by thundercloud rain were later reported by Simpson (1909). These measurements were taken by recording the potential transferred to a galvanised iron "receiver" collecting rainfall. The rain would then run off of the receiver into a tipping bucket rain gauge, measuring the rainfall rate. Together, these two measurements allowed the charge per cubic centimetre of rain to be determined. Simpson found that there was substantially more positive charge brought down by rain than negative charge, in contrast to the predominant negative charge which would be required for the theory that precipitation maintained the negative charge of the Earth. Later, Simpson (1912) discussed subsequent observations occurring from a range of other locations, showing conclusively that for all types of rain a positive charge, not negative, is brought to the Earth.

It was clear that from the results from Simpson (1909) that further theory was required to explain the persistence of the negative charge of the Earth's surface. Point discharge played a key role in a number of the investigations which attempted to gain this understanding.

## 2.1 Controversy over thundercloud polarity

Related to the precipitation hypothesis for sustaining the Earth's negative charge, there was the apparent assumption that the charge structure of thunder clouds was that of a positive dipole (i.e. a positive charge situated above a negative charge). The result of Simpson (1909) implied the opposite, however; the fact that the rain underneath thunderclouds was predominantly positively charged implied that the base of these clouds was positive, and so suggested a negative dipole (i.e. a negative charge above a positive charge). As there had been no direct observations of the charge structure, however, there continued to be debate on the polarity of thundercloud dipoles throughout the early 20th century. A review of this disagreement between two scientists, G.C Simpson and C.T.R. Wilson has been given by Williams (2009).


Several years after his previous precipitation theory had been disproven, Wilson (1921) reported his findings of an investigation into the electric field during lightning strikes. This investigation found that the electric field changes observed during the majority of lightning strikes were consistent with negative charge being brought from the cloud to the Earth, which Wilson named a "positive discharge". Wilson used arguments based on the relative frequency of these positive discharges, to suggest the presence of a positive dipole in thunderclouds.

In this report, Wilson addressed the evidence suggesting a negative dipole found from the previous work by Simpson. Wilson argued that the arrival of positively charged rain at the Earth's surface did not provide evidence that the rain was positively charged as it left the cloud, instead suggesting that positive ions emitted from the surface could cause a reversal of the polarity of the rain droplets. This reversal of polarity would cause the droplets to be positively charged when observed at the surface, despite being negatively charged when at the cloud base. Wilson suggested point discharge currents emitted from blades of grass and the leaves of trees could be sources for these positive ions. The general upwards flow of positive ions from point discharge processes, along with the negative charges carried downwards from the cloud by the rain would together lead to a negative charge being brought to Earth by the thundercloud. Coupled with a current flow above the clouds, bringing a positive charge to the upper atmosphere, this would act to maintain the charge separation between the surface and ionosphere, restoring the potential difference which is lost via the fair weather conduction current. These mechanisms formed the basis of Wilson's model of the global atmospheric electric circuit, a concept which continues to offer explanatory value in atmospheric electricity.

## 2.2 Evidence for the global circuit model

Following the proposal of a global atmospheric electric circuit by Wilson, Whipple and Scrase (1936) reported their results of an investigation into the point discharge data recorded at Kew Observatory. The PDC data used in this investigation was measured using a galvanometer connected to a sharp point on the tip of a tall mast. Whipple and Scrase analysed both the PDC response of the sensor to atmospheric conditions, developing a parameterisation describing the operation of the sensor, and several trends recorded by the PDC sensor in a period of continuous observation. This parameterisation was important to the development of PDC sensors as atmospheric electricity instruments, as it allowed the measured currents to be converted into a measure of the PG. This parameterisation, and the development of subsequent parameterisations will be discussed in Sect. 4.

In their observations of the continuous operation of the PDC sensor, Whipple and Scrase observed that there was a diurnal variation in the net outflow of positive discharge currents from the sensor. Based on previous suggestions that thunderstorm variations were responsible, the PDC variations were compared against the diurnal variation of global thunderstorm frequency. The figure used by Whipple and Scrase for this comparison is shown in Fig. 2. From this comparison, it was seen that there was a close relationship between the variations of global thunderstorm area and local PDC.

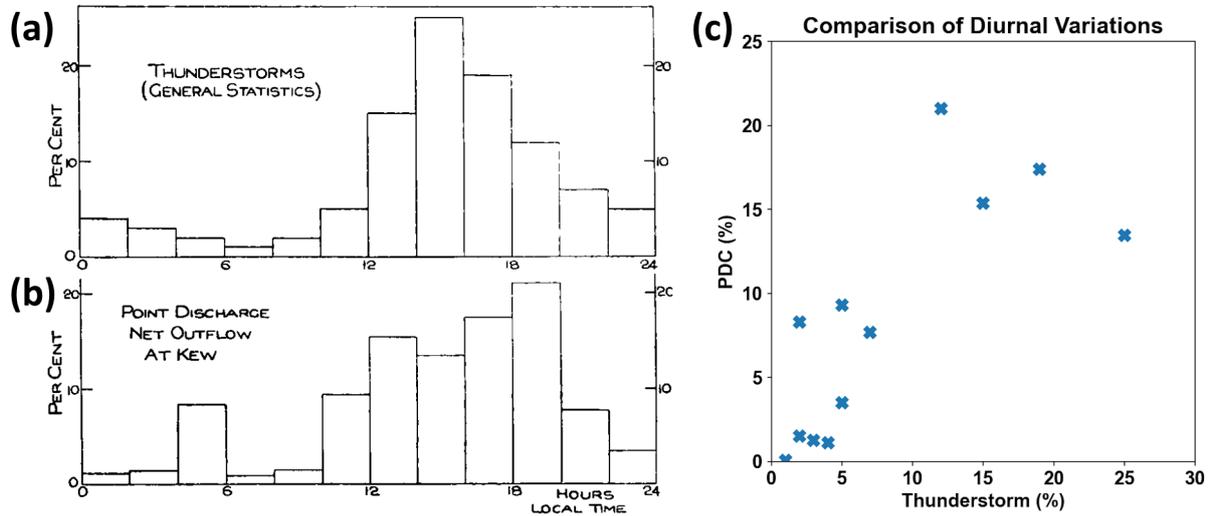

**Figure 2.** Comparison of the diurnal variation in thunderstorm occurrence with the net outflow of point discharge at Kew Observatory. [Figure](#)-(a) shows a bar chart of the relative frequency of thunderstorms across a 24h period, with bars of width 2h. (b) shows a similar bar chart, showing the relative strength of the outflow of point discharge from the Kew site, as recorded in the years 1933 and 1934. This outflow describes the net vertical current, with a positive value being a net downwards flow of negative charge. It should be noted that from investigation of the original data used to produce this figure, provided in the paper by Whipple and Scrase (1936), a minor error in the figure was identified. The bar covering the period of 6-8 hours has a value of  $\approx 1\%$ , while analysis of the data shows that this value should be  $\approx 0.1\%$ . In (c) the data from the bar charts in (a) and (b) is compared by plotting the point discharge outflow against the thunderstorm frequency. A clear correlation is visible in such a plot, with Pearson correlation coefficient calculated to be 0.76. This clearly shows the presence of a correlation, as was reported by Whipple and Scrase. (a), (b) were taken from Whipple and Scrase (1936).

Whipple and Scrase further went on to compare the diurnal variation in thunderstorm area with the PG data recorded by the ship *Carnegie*. This dataset, often referred to as the “Carnegie curve”, shows a diurnal variation in PG dependent on Universal Time, not local time (Harrison, 2013, 2020). Whipple and Scrase found that there was a good agreement between the Carnegie curve and the global thunderstorm area, suggesting that the two were related. This, along with the variations in PDC, helped to confirm that disturbed weather regions on Earth were in fact linked to fair weather regions, and has been considered an important milestone in the history of atmospheric electricity, offering confirmation to Wilson’s theory of a global atmospheric electric circuit.

### 2.3 Observation of thundercloud polarity


The confirmation of the global circuit model did not definitively provide evidence for a given model of the charge structure of thunderclouds, so did not end the dispute between Wilson and Simpson. To resolve this dispute, in situ observations of the charge structure were desired. To make these observations, Simpson and Scrase (1937) developed a balloon borne instrument for measuring the PG, which they named the alti-electrograph<sup>1</sup>. The alti-electrograph observed the polarity of the PG as it rose through the atmosphere, while additionally taking measurements of the atmospheric pressure and humidity. To measure the PG polarity, the alti-electrograph made use of point discharge electrodes extending above and below the instrument. It was known that for a long conductor in an electrical field, point discharge will occur such that a conventional current will flow into the conductor at the end where the atmospheric potential is positive, and flow out from the conductor at the end where the potential is negative. The alti-electrograph was constructed such that the electrodes formed a tall vertical conductor, and measurements were taken of the polarity of current flowing through the two electrodes, which were used to infer the polarity of the PG. The polarity of current was determined by connecting both electrodes to a piece of pole finding paper. As the current flowed between the electrodes, a deposit of Prussian blue was built up at the anode, with no such marking at the cathode. The current polarity was determined as a function of time by moving the electrodes across the paper. Finally, by recovering the alti-electrograph after its sounding, it was possible to compare the polarity data against the pressure data, providing a profile of the polarity with height. A system was designed to release the alti-electrograph instrumentation from the balloon at a given altitude, and have it descend to Earth using a parachute. Typically, this separation was set to occur at an altitude of 8-9 km, however in some cases this separation did not occur and measurements were taken even higher than expected. A photograph of the alti-electrograph as shown in the report by Simpson and Scrase has been included in Fig. 3.

The alti-electrograph apparatus was used in a number of atmospheric soundings; from July 1934 to October 1936 70 of these soundings were performed, in a range of weather conditions. Through analysis of trends in the data, it was found that the main body of thunderclouds were negatively charged, with a positively charged upper region. The observation of positive dipoles in these thunderclouds brought about an end to the disagreement between Wilson and Simpson on the charge structure of thunderclouds. Additionally, the positive charge at the upper edge of the clouds supplied a mechanism for the charge separation between the surface and ionosphere to be maintained. This provided additional evidence for the global circuit model theorised by Wilson.

From the alti-electrograph data, it was found that frequently an additional smaller positively charged region was located at the base of the cloud, below the negatively charged region. This finding is in agreement with our modern understanding of thunderstorm charge distributions; it is known now that in a typical thundercloud, there are two regions of net positive charge, a smaller one at the base and larger one in the upper cloud, with a region of negative charge in between (Williams, 1989). This arrangement is referred to as an electrical tripole. The agreement with our modern understanding shows the high quality of the measurements made with the alti-electrograph device.

---

<sup>1</sup>The mixed Latin and Greek roots of this word were excused as Simpson and Scrase wished to convey the meaning of “height” readily in the instrument’s name

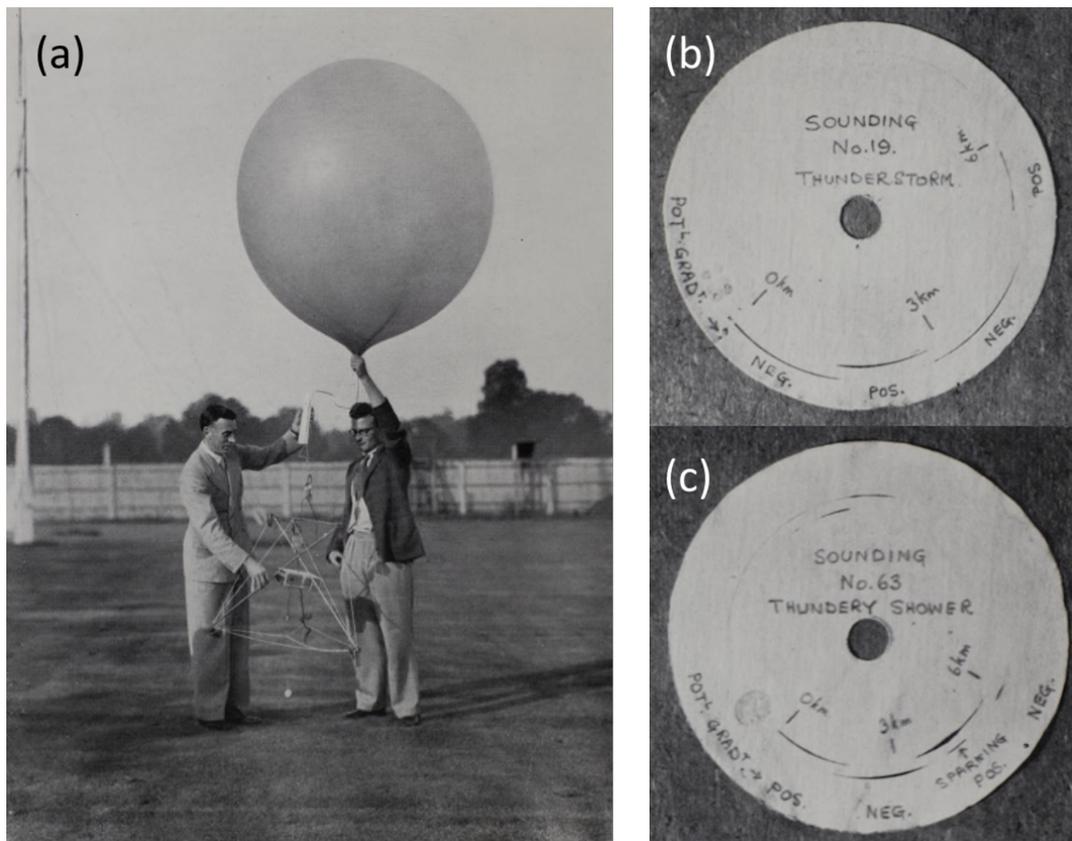

**Figure 3.** Photographs of the alti-electrograph, and the data recorded by it. (a) shows the alti-electrograph being launched by Sir George Clarke Simpson (left) and presumably Frederick John Scrase (right). (b) and (c) show the data recorded by the alti-electrograph instrumentation from two different deployments. The altitudes of 0, 3, and 6 km have been annotated on these records, along with the polarity of the recorded PG as “pos” or “neg”. Additionally, in (c), a burn mark from electrical sparking has been indicated. The “striking” blue colour of the original record is lost in this black and white photograph; in the originals the data recorded in blue was clearly distinct from the burn mark. Figures have been edited from Simpson and Scrase (1937).

As discussed previously, Simpson (1909) argued in favour of a positive dipole in thunderclouds, due to positively charged rains observed at the surface. It is known now that the source of these charged rains is the small positive region at the base of thunderclouds. Before this positive region was discovered, Wilson made arguments for a negative cloud base leading to positively charged rains, owing to positive ions emitted from PDCs at the surface. It is important to note that although it is now known that these emitted ions are not required to explain the polarity of charged rain, it is still considered that the effects of PDCs on the surface are important to the flow of charge in the global atmospheric electric circuit. A number of studies published following the discovery of the tripolar structure of thunder clouds have drawn importance to the effects of these PDCs, with them identified as an important method by which a net negative charge is brought to the Earth’s surface from the atmosphere (Immelman, 1938; Chalmers, 1967; MacGorman and Rust, 1998).

### 3 Other PDC investigations of the 20th and 21st Centuries

The investigations described so far have demonstrated the critical role that point discharge has played during an important period of atmospheric electricity history. Following the confirmation of the global circuit model, point discharge sensors continued to be used for a range of atmospheric electricity investigations, a number of which are highlighted here.

#### 3.1 Alti-electrographs and Coronasondes

The initial alti-electrograph investigation by Simpson and Scrase, showing the positive dipole in thunderclouds, was well accepted. Despite this, the finding of lower positive regions of charge in these clouds met with difficulty. In a subsequent paper, Simpson and Robinson (1941) discuss the complaints against this finding by re-analysing the data from the original soundings, again finding evidence for this lower charge region. In addition to this re-analysis, multiple further soundings using the alti-electrograph were performed by Simpson and Robinson. In all of these soundings, the lower positive charge was identified, providing strong evidence for its existence. ~~In these soundings,~~

In the further soundings performed by Simpson and Robinson, the authors additionally attempted to determine the nature of the charge separation process creating the positive dipole, by comparing the estimated temperature with the charge structure. Through this analysis, it was determined that the centres of the main charge regions were both below 0°C, suggesting that processes involving ice crystals were important to this charge separation.

To investigate the electrical structure of thunderclouds further, other point discharge instrument packages were developed, improving upon the alti-electrograph instrument. As mentioned previously, the alti-electrograph required the recovery of the instrumentation to retrieve the collected data. A subsequent investigation by Belin (1948) managed to remove this limitation by modifying a radiosonde to take point discharge measurements. The radiosonde would then transmit the data to a receiver on the surface, removing the need to recover the instrumentation.


Later, Chapman (1956) used a similar (radiosonde-based) method to investigate the structure of thunderclouds. The radiosonde instrumentation was used to investigate how the electrical structure aligns to the temperature profile inside these clouds, since virtually all previous investigations had not measured the temperature and the PG directly. These modified radiosondes were additionally used to investigate the PGs present inside blizzards (Chapman, 1953). Through this investigation, Chapman was able to show that the electrification in these snowstorms was not limited to the ground.

Recognising the value of these previous studies, Weber and Few (1978) developed a similar instrument. The authors described such an instrument, using a radiosonde modified to take point-discharge measurements, as a “coronasonde”. The coronasonde was described as inexpensive, easy to use, and was able to provide quantitative information on the PG inside electrical clouds. Later, in order to ensure the accuracy of this quantitative information, laboratory experiments were performed to understand the influence of several atmospheric parameters - such as temperature, pressure, water vapour content, and wind speed - on the recorded point discharge currents (Byrne et al., 1986). The utility of the coronasonde instrument meant that it was used in a number of investigations (Weber and Few, 1978; Weber et al., 1983; Byrne et al., 1983). These investigations helped to

220 further the understanding of the charge structure inside thunderclouds, as well as provide more evidence for the presence of an electrical tripole.

### 3.2 Non-balloon soundings

Atmospheric soundings using point discharge are were not limited to balloon based measurements; A NOAA technical report, and later patent, describe a rocket-borne instrumentation package for taking point discharge measurements (Ruhnke, 1971, 1973). A diagram of this instrumentation is shown in Fig. 4. It was observed that ground based observations of the PG in clouds were difficult if not impossible to obtain. Additionally, although aeroplane and balloon based observations allowed the PG to be measured in situ, there were a number of downsides to these observation methods, such as the requirement for aeroplanes to penetrate the cloud several times, and the slow ascent speed of balloons. As an alternative, rocket-based observations were suggested, as a way to rapidly obtain a profile of the PG through the cloud. It was noted that the high speed of the rocket meant that rapid measurements would have to be obtained, in order to have a good spatial resolution of datapoints; a sampling rate of 25 Hz was suggested as a requirement. Additionally, the sensor would have to be able to survive large accelerations (up to 50 g). These criteria led to the selection of a point discharge sensor to measure the PG.

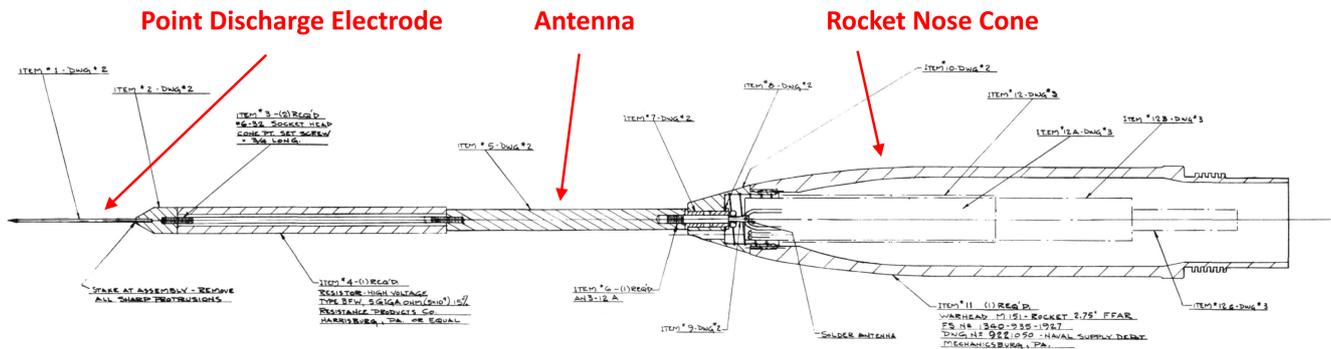

**Figure 4.** Annotated drawing of the rocket borne point discharge instrumentation described by Ruhnke (1971). This drawing was part of a series of diagrams showing the construction of the instrumentation package. Several additional annotations have been indicated in red, showing the location of the point discharge electrode, antenna, and the rocket warhead nose cone. The point discharge electrode was constructed from a tungsten steel rod of diameter 1/16th inch, sharpened to a point. The instrumentation package was designed for use with the FFAR-rocket Folding-Fin Aerial Rocket (FFAR), nicknamed “mighty mouse”). Figure has been altered from Ruhnke (1971).

PDC sensors have also been used onboard spacecraft. The Venera 13 & 14 missions utilised point discharge sensors on board their “groza-2” instrumentation package, taking electrical measurements in the atmosphere of Venus (Ksanfomality et al., 1982). Little information is available on the specifics of these sensors, however the principal investigator of the instrumentation package, Leonid Ksanfomality Ksanfomality, confirmed during a personal communication with Lorenz (2018) that it contained

a point discharge electrode. Some recent work has been performed recently to attempt to infer details on the sensor design via logical and engineering considerations (Sukanjanajtee and Aplin, 2024).

### 3.3 Grounded investigations; the balance of charge

One of the most prolific point discharge researchers in the 20th Century was J.A. Chalmers, who authored 17 papers on the subject between 1941 and 1967, with the final paper being published posthumously (Aplin, 2018; Jhawar and Chalmers, 1967). Chalmers was instrumental in the development of parametrisations of the operation of point discharge sensors, which will be discussed further in Sect. 4. In addition to these investigations of PDC sensors, much of Chalmers' research considered the balance of charge in the global atmospheric electric circuit, with a focus on the contributions that naturally occurring point discharge currents had on the flow of charge in disturbed weather regions. To understand the quantity of naturally occurring point discharge, many investigations were performed by Chalmers and others, considering the point discharge occurring from trees.

An investigation by Schonland and Wilson (1928) considered the relative importance of various current sources between the atmosphere and Earth in disturbed weather regions. The current flows of lightning strikes, charged rain, and PDCs were considered in this investigation. To estimate the amount of PDC caused by a thunder cloud, the current flowing through a single tree was investigated. For this experiment, a thorn tree (*Acacia Karroo*) was cut down and mounted on an insulated platform. The current flowing through the tree was then measured for various electric field strengths observed under a thundercloud. As the tree had been cut down for this experiment, it was noted that the leaves withered. The thorns on the tree remained, however, and additional branches were occasionally attached. From the results of this experiment, an estimate was produced for the amount of PDC caused by a thundercloud. This estimate was compared against similar estimates made for the current flow caused by lightning and charged rain, where it was concluded that point discharge was the dominant process for the transfer of charge to the surface.

As pointed out by Maund and Chalmers (1960), the experiment performed by Schonland and Wilson was not representative of the currents flowing into a living tree. Citing another unsuccessful investigation of the discharge current flowing through a tree as motivation, Maund and Chalmers set out to investigate the discharge current through trees through indirect methods. In conditions with appreciable wind speed, the ions emitted from a point discharge source are expected to travel with the wind. It is thus expected that a reduction in the PG will occur downwind, due to the space charge produced by the presence of these ions. Maund and Chalmers developed theory to determine the expected reduction in PG for a given discharge current. This theory was verified through taking measurements upwind and downwind of a discharging point located atop a tall mast. Maund and Chalmers then applied this to indirectly measure the point discharge from a tree, through measurements of the reduction in downwind PG. The results from this investigation appeared to imply that a tree in leaf produced significantly less point discharge than previous estimates suggested.

A subsequent investigation by Bent et al. (1965) attempted to experimentally measure the space charge produced by point discharge from trees. From this investigation it was shown clearly that a space charge was produced, with a similar magnitude to that from an artificial point. This investigation concluded that previous estimates of the total point discharge rate were likely

270 accurate, and that point discharge plays an important role in the flow of negative charge to the surface of the Earth in disturbed weather regions.

A number of investigations have attempted to directly measure the current flowing through a living tree, using electrodes placed inside the tree (Kirkman, 1956; Milner and Chalmers, 1961; Chalmers, 1962b, 1964; Jhawar and Chalmers, 1967). The general finding from these investigations was that the results from such a method were inconsistent. Chalmers (1964) 275 concluded that the tree investigated did not behave as a simple electronic system, and could not be represented by a resistor-capacitor system.

Building upon previous investigations, Jhawar and Chalmers (1967) took measurements of the current flowing through a live tree planted in a pot. The tree was placed between two metal plates, which were charged such that a voltage up to 50 kV was able to be produced between them. The point discharge flowing into the tree, towards Earth, was then measured using a 280 galvanometer. This allowed a relationship between the voltage and point discharge current to be determined for the case of a single, entire tree. The laboratory set up, including the spruce tree, is shown in Fig. 5. From measurements of the current at different voltages, a relationship was able to be identified between the applied voltage and point discharge current. This relationship was of the form:


$$I = V(V_0 - V)^2 \quad (1)$$

285 where  $I$  is the point discharge current through the entire tree,  $V$  is the voltage, and  $V_0$  is the minimum voltage for point discharge to occur. This equation was further derived theoretically in the same paper.

These investigations have verified that naturally occurring point discharge is of some ~~importance~~. The nature of the point discharge process occurring from trees has been investigated in a range of capacities, and it has been shown that point discharge has an important role in the balance of current in the global atmospheric electric circuit.

### 290 3.4 Modern applications of PDC sensors

Point discharge sensors may be considered historical atmospheric electricity instruments; however they still have some relevance today. As mentioned in Sect. 1, PDC sensors are very simple devices which lack any moving parts. As such, these sensors tend to be very cheap and robust instruments, which require little maintenance. This has been demonstrated to be advantageous to the deployments on ~~air~~-aircraft and spacecraft discussed so far. In addition to this, PDC sensors are well suited to grounded 295 deployments in remote or harsh conditions where damage to delicate components would be likely, or regular maintenance is not possible. An example of this utility is demonstrated by an investigation of the electrical properties of dust devils by Lorenz et al. (2016). In this investigation, an instrument package was deployed in an area of the Chihuahuan desert, in New Mexico, USA, and left to collect data for over a month without maintenance. Given the harsh conditions a point discharge sensor was used to take electrical measurements. It was found that the point discharge sensors operated well in their deployment, providing 300 electrical measurements of the dust devils which passed over the instrumentation.

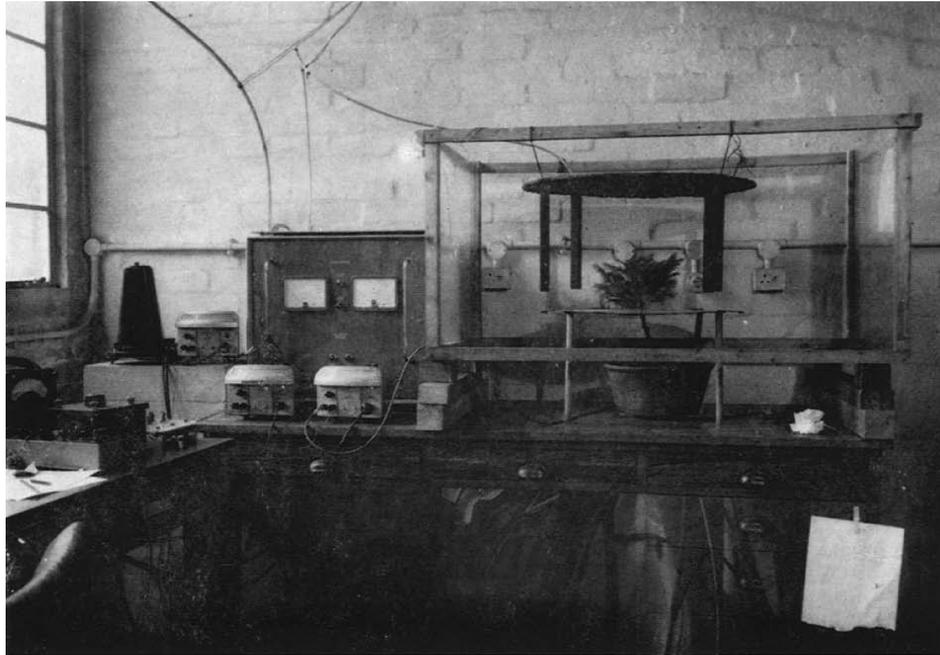

**Figure 5.** Experimental set up from Jhavar and Chalmers (1967). A live spruce tree, approximately 60 cm tall, in a plant pot is positioned between two metal plates. The metal plates are charged to produce a voltage between them. The large box to the left of the tree appears to be the power supply for this, with a cable visible running towards the upper plate. The total point discharge flowing into the tree was measured using a galvanometer connected between the plant pot and the earth. The three smaller boxes located next to the power supply appear to be optical galvanometers, with the rightmost of these wired up to the plant pot. Measurements of the point discharge were taken for a range of different voltages, on several days. Figure taken from Jhavar and Chalmers (1967). Reproduction rights were acquired for this figure.

Across fair weather and disturbed weather conditions, the PG can vary across several orders of magnitude. To take measurements across this entire range, it is necessary to have instrumentation with a very large operational range. As is evident from the parametrisations that will be discussed in section 4, a range of several orders of magnitude in the PG will also cause a range of several orders of magnitude in the current recorded by a PDC sensor. One method developed to capture the full range of these currents is to have PDC instrument with a logarithmic response. Such a sensor has been described by Marlton et al. (2013). This device uses LEDs as feedback resistors to produce a [bi-polar](#) logarithmic electrometer, providing an output voltage proportional to the logarithm of the input current. The wide range of this instrument allows atmospheric electricity observations to be made across both fair weather and disturbed weather conditions, without need of any range-switching.

Point discharge can be an electrical hazard, making it important to monitor. Burt (2022) describes an event where anomalous measurements were recorded by the data logger at the Reading University Atmospheric Observatory. It was verified, through comparison with data recorded by the point discharge sensor, that these anomalous readings were caused by point discharge occurring from the anemometers. Without having a point discharge sensor at the field site, which measured large discharge

currents at the same time as the anomalous readings, it would have been difficult to identify the source of the anomaly. As such, the presence of a point discharge sensor is demonstrably advantageous to such a field site.

#### 315 4 Characterising the response of PDC sensors

It has been understood for a while that the magnitude and polarity of a point discharge current is dependent on the electric field driving the current. What has not been understood, however, was the exact form of the relationship between the discharge current and the electric field (and any other atmospheric parameters). An accurate description of the operation of these sensors was desired, since it would allow PDC sensors to be used effectively as atmospheric electricity instruments. As such, there have  
320 been a number of investigations performed which attempted to obtain such a parameterisation, through both theoretical and empirical means; many of the theoretical investigations were performed by J.A. Chalmers, who was noted as being exceptionally driven in finding theoretical analytical solutions to real-world problems (Aplin, 2018). A number of the key investigations attempting to describe the operation of PDC sensors are now described.

As was mentioned in Sect. 2, an early attempt to describe the operation of a PDC sensor was performed by Whipple and  
325 Scrase (1936). This investigation involved analysis of the PDC data recorded at Kew Observatory, comparing it against PG data. From this empirical investigation, a power law relationship between the PG and PDC was identified, taking the form:

$$I = a(F^2 - M^2) \quad (2)$$

where  $I$  is the discharge current,  $F$  is the potential gradient,  $M$  is a constant describing the minimum PG for point discharge to occur, and  $a$  is some other constant. This equation was later derived by Chalmers (1952) from theoretical considerations.  
330 For this derivation, it was assumed that the point discharge process was limited by the build up of space charges, and that these charges were removed from the vicinity of the sharp point by electrical forces alone.

Chalmers' 1952 derivation made the assumption that wind had a negligible effect on the point discharge process. Note that the literature makes the point that this assumption is not the same as the assumption that the wind speed itself is negligible; the effects of the wind speed on the space charge could also be assumed to be negligible if we are dealing with several PDC  
335 sources close together (Chalmers, 1952; Kirkman and Chalmers, 1957). In this case, as the ions forming the space charge are removed from the vicinity of a given point, the ions from another point's space charge move to replace them. As such, the wind speed does not act to greatly reduce the space charge around a given point.

Subsequent investigations have found that the assumption that the effects of wind speed are negligible is not valid in many circumstances. The form of the equations derived including the effects of this wind speed are variable, however. Through  
340 theoretical considerations, Chalmers and Mapleson (1955) derived an equation to describe the PDC from an isolated point. This characterisation was given by:

$$I = ab(hF)^b W^c W^d \quad (3)$$

where  $I$ ,  $F$  are as before,  $h$  is the height of the point above ground,  $W$  is the wind speed, and  $a, b, c, d$  are constants (with theory providing  $b+c=2c+d=2$ ). Note that it was identified at the time that since there is no term dependent on the minimum PG for PDC to occur, as there is in Eq. 2, then this equation will only be approximately accurate, and will diverge from observations at low PGs. To verify the theoretical equation, Chalmers and Mapleton investigated the PDC detected by a captive balloon. The data found from this investigation reinforced that the form of equation derived was valid.

A further series of investigations by Chapman (1956), Large and Pierce (1957), Kirkman and Chalmers (1957), and suggestions by Chalmers led to another form of characterisation including wind speed being developed. This was given in terms of the electric potential at the discharge tip rather than the potential gradient. Converting to potential gradient, assuming a constant PG between the surface and the discharge point, allows the description of the PDC sensor to be written as:

$$I = ag(F - M)(W^2 + bFkF^2)^{1/2} \quad (4)$$

where  $I$ ,  $F$ ,  $W$ ,  $M$ , are as before, and  $a, b, g, k$ , are constants. This form of equation was further investigated by Chalmers (1957); Chalmers used data from a number of previous investigations to investigate if this equation was able to describe the operation of a PDC sensor in general. It was found that if the parameters  $a, b, g, k$ , and  $M$  were adjusted, then for each dataset investigated, a good fit was able to be obtained. Later, via theoretical considerations, Chalmers (1962a) was able to derive this equation from theoretical considerations. This derivation provided some theoretical meaning to the constants  $a, b, g, k$ . The values found from these theoretical considerations were not in exact agreement with those found empirically, however.

In addition to the parameters discussed so far, lab based investigations of point discharge have shown further dependencies on properties such as the temperature, gas pressure, and atmospheric composition (Haidara et al., 1997; Bologa et al., 2011). Typically at the surface of Earth these values remain fairly constant, so the parameterisations which neglect them will remain mostly valid. It does raise the point, however, that these parameterisations are not describing the full process of the operation of the PDC sensors, and the inclusion of additional terms would likely increase their accuracy. Recently, in an investigation of the operation of a point discharge sensor with relatively rapid sampling (1Hz), it was observed by McGinness et al. (2024) that the sensor was sensitive to both free currents (caused by the flow of charge), and displacement currents (caused by a time-varying electric field). As such, it was found that including additional terms dependent on the rate of change of the PG leads to an improvement in the accuracy of the description of the PDC sensor. To describe the operation of PDC sensors accurately, it may be necessary to identify and include further terms in such a description. If this were possible, and the operation of the sensors were able to be described with a high precision, then it would greatly improve the utility of these sensors as accurate atmospheric electricity instruments; it has previously been observed that a lack of a good description of the operation of PDC sensors has limited their utility as atmospheric electricity instruments (MacGorman and Rust, 1998).

## 5 Conclusions

Point discharge has played an important role in atmospheric electricity history, particularly throughout the 20th and 21st centuries. Both through considerations of the naturally occurring process, and from measurements from point discharge sensors,

375 point discharge has played an important role in several milestone investigations of 20th century atmospheric electricity. These investigations include considerations made by C.T.R Wilson in proposing the global circuit model, some early proof of this model as identified by Whipple and Scrase, and the first in situ measurements of the electrical structure of thunderclouds.

Point discharge sensors have proved to continue to be effective atmospheric electricity instruments in the years following this, being used in many other investigations. These investigations involved grounded and airborne sensors, both in Earth's atmosphere and the atmosphere of Venus. During this time, knowledge of the operation of PDC sensors has been advanced by the development of different characterisations of their operation. ~~The advancement of these characterisations may allow PDC sensors to be~~

Point discharge sensors show promise for continuing to be useful in the future. A primary advantage of these sensors is that their simple design makes them very cheap, in comparison to other atmospheric electricity instruments such as field mills. In recent years, several sensor networks of relatively cheap instruments have been utilised for air quality measurements (deSouza et al., 2019; Bi et al., 2020; Tripathi et al., 2024). Additionally, the Met Office has produced a platform, the Weather Observations Website (WOW), which brings together meteorological observations submitted by members of the public. The cheap nature of point discharge sensors would facilitate a network of these sensors being produced, whether that is performed through a single actor, or through citizen scientists deploying sensors and logging their observations, akin to the WOW. As well as this possible utility as part of a network of instruments, point discharge sensors will continue to have utility in the deployments they are currently used for; these sensors are able to take atmospheric electricity measurements in both fair and disturbed weather, and they can take these measurements in harsh conditions which would cause damage to more delicate instruments. Finally, as the characterisations of PDC sensors develop, these sensors may be able to operate as even more accurate as-atmospheric electricity instruments in the future.

395 *Author contributions.* BM, GH, KA, MA contributed to the ideas. BM produced the original figures, and performed the edits to pre-existing figures. BM prepared the original draft, with edits suggested by GH, KA, MA. BM performed the revisions to the manuscript.

*Competing interests.* Some authors are members of the editorial board of History of Geo- and Space Sciences.

*Acknowledgements.* Much of this research was performed during the undertaking of a-BM's PhD project, funded by STFC.

## References

- 400 Met Office WOW, [wow.metoffice.gov.uk](http://wow.metoffice.gov.uk), last access: 03 September 2025.
- Aplin, K. L.: Atmospheric electricity at Durham the scientific contributions and legacy of J. A. (“Skip”) Chalmers (1904–1967), *History of Geo- and Space Sciences*, 9, 25–35, <https://doi.org/https://doi.org/10.5194/hgss-9-25-2018>, 2018.
- Belin, R. E.: A Radiosonde Method for Atmospheric Potential Gradient Measurements, *Proceedings of the Physical Society*, 60, 381–287, <https://doi.org/10.1088/0959-5309/60/4/307>, 1948.
- 405 Bent, R. B., Collin, H. L., Hutchinson, W. C. A., and Chalmers, J. A.: Space charges produced by point discharge from trees during a thunderstorm, *Journal of Atmospheric and Terrestrial Physics*, 27, 67–72, [https://doi.org/https://doi.org/10.1016/0021-9169\(65\)90062-0](https://doi.org/https://doi.org/10.1016/0021-9169(65)90062-0), 1965.
- Bi, J., Wildani, A., Chang, H. H., and Liu, Y.: Incorporating Low-Cost Sensor Measurements into High-Resolution PM<sub>2.5</sub> Modeling at a Large Spatial Scale, *Environmental Science & Technology*, 54, 2152–2162, <https://doi.org/https://doi.org/10.1021/acs.est.9b06046>, 2020.
- 410 Bologa, A., Paur, H., Seifert, H., and Woletz, K.: Influence of gas composition, temperature and pressure on corona discharge characteristics, *International Journal on Plasma Environmental Science & Technology*, 5, 110–116, 2011.
- Burt, S.: The gust that never was: a meteorological instrumentation mystery, *Weather*, 77, 123–126, <https://doi.org/https://doi.org/10.1002/wea.3830>, 2022.
- Byrne, G. J., Few, A. A., and Weber, M. E.: Altitude, thickness and charge concentration of charged regions of four thun-  
415 derstorms during trip 1981 based upon in situ balloon electric field measurements, *Geophysical Research Letters*, 10, 39–42, <https://doi.org/https://doi.org/10.1029/GL010i001p00039>, 1983.
- Byrne, G. J., Few, A. A., and F., S. M.: The effects of atmospheric parameters on a corona probe used in measuring thunderstorm electric fields, *Journal of Geophysical Research: Atmospheres*, 91, 9911–9920, 1986.
- Caesar, J.: *The African War*, Harvard University Press, translated by Way, A. G., c.40 BCE [1955].
- 420 Canton, J.: XCIII. A Letter to the Right Honourable the Earl of Macclesfield, President of the Royal Society, concerning Some New Electrical Experiments, by John Canton, M.A. and F. R. S., *Philosophical Transactions of the Royal Society of London*, 48, 780–785, <https://doi.org/https://doi.org/10.1098/rstl.1753.0093>, 1753.
- Chalmers, J. A.: The relation between point discharge current and field, *Journal of Atmospheric and Terrestrial Physics*, 2, 292–300, 1952.
- Chalmers, J. A.: Point-discharge current, potential gradient and wind-speed, *Journal of Atmospheric and Terrestrial Physics*, 11, 301–302,  
425 [https://doi.org/https://doi.org/10.1016/0021-9169\(57\)90081-8](https://doi.org/https://doi.org/10.1016/0021-9169(57)90081-8), 1957.
- Chalmers, J. A.: The relation of point-discharge current to potential difference and wind-speed, *Journal of Atmospheric and Terrestrial Physics*, 24, 339–344, 1962a.
- Chalmers, J. A.: Point-discharge currents through a living tree during a thunderstorm, *Journal of Atmospheric and Terrestrial Physics*, 24, 1059–1063, [https://doi.org/https://doi.org/10.1016/0021-9169\(62\)90160-5](https://doi.org/https://doi.org/10.1016/0021-9169(62)90160-5), 1962b.
- 430 Chalmers, J. A.: The electrical properties of a living tree in relation to point discharge, *Journal of Atmospheric and Terrestrial Physics*, 26, 129–134, [https://doi.org/https://doi.org/10.1016/0021-9169\(64\)90114-X](https://doi.org/https://doi.org/10.1016/0021-9169(64)90114-X), 1964.
- Chalmers, J. A.: *Atmospheric Electricity*, Pergamon Press, 2 edn., 1967.
- Chalmers, J. A. and Mapleson, W. W.: Point discharge currents from a captive balloon, *Journal of Atmospheric and Terrestrial Physics*, 6, 149–159, [https://doi.org/https://doi.org/10.1016/0021-9169\(55\)90022-2](https://doi.org/https://doi.org/10.1016/0021-9169(55)90022-2), 1955.

- 435 Chapman, S.: Thundercloud Electrification in Relation to Rain and Snow Particles, in: *Thunderstorm Electricity*, edited by Bryers, H., University of Chicago Press, 1953.
- Chapman, S.: Electrostatic field measurements, corona discharge, and thunderclouds, *Cornell Aeronautical Laboratory Reports*, 68, 1956.
- deSouza, P. et al.: A Nairobi experiment in using low cost air quality monitors, *Clean Air Journal*, 27, 2019.
- Elster, V. J. and Hans, G.: Ueber eine Methode, die elektrische Natur der atmosphärischen Niederschläge zu bestimmen, *Meteorologische Zeitschrift*, 5, 1888.
- 440 Elster, V. J. and Hans, G.: Beobachtungen über die Eigenelectricität der atmosphärischen Niederschläge, *Terrestrial magnetism and atmospheric electricity*, 4, 1899.
- Exner, F.: Summary of the results of recent investigations in atmospheric electricity, *Terrestrial Magnetism and Atmospheric Electricity*, 5, 167–174, <https://doi.org/https://doi.org/10.1029/TE005i004p00167>, 1900.
- 445 Exner, F.: Summary of the results of recent investigations in atmospheric electricity, *Terrestrial Magnetism and Atmospheric Electricity*, 6, 1–12, <https://doi.org/https://doi.org/10.1029/TE006i001p00001>, 1901.
- Franklin, B.: The Kite Experiment, *The Pennsylvania Gazette*, 1752.
- Haidara, M., Denat, A., and Atten, P.: Corona discharges in high pressure air, *Journal of Electrostatics*, 40-41, 61–66, [https://doi.org/https://doi.org/10.1016/S0304-3886\(97\)00015-6](https://doi.org/https://doi.org/10.1016/S0304-3886(97)00015-6), proceedings of the 8th International Conference on Electrostatics, 1997.
- 450 Harrison, R. G.: The Carnegie Curve, *Surveys in Geophysics*, 34, 209–232, <https://doi.org/https://doi.org/10.1007/s10712-012-9210-2>, 2013.
- Harrison, R. G.: Behind the curve: a comparison of historical sources for the Carnegie curve of the global atmospheric electric circuit, *History of Geo- and Space Sciences*, 11, 207–213, <https://doi.org/https://doi.org/10.5194/hgss-11-207-2020>, 2020.
- Harrison, R. G. and Riddick, J. C.: Atmospheric electricity observations at Eskdalemuir Geophysical Observatory, *History of Geo- and Space Sciences*, 15, 5–16, <https://doi.org/https://doi.org/10.5194/hgss-15-5-2024>, 2024.
- 455 Harrison, R. G. and Schlegel, K.: Atmospheric electricity observations by Reinhold Reiter around Garmisch-Partenkirchen, *History of Geo- and Space Sciences*, 14, 71–75, <https://doi.org/https://doi.org/10.5194/hgss-14-71-2023>, 2023.
- Immelman, M. N. S.: X. Point-discharge currents during thunderstorms, *The London, Edinburgh, and Dublin Philosophical Magazine and Journal of Science*, 25, 159–163, <https://doi.org/https://doi.org/10.1080/14786443808561998>, 1938.
- Jhawar, D. S. and Chalmers, J. A.: Point-discharge currents through small trees in artificial fields, *Journal of Atmospheric and Terrestrial Physics*, 29, 1459–1463, [https://doi.org/https://doi.org/10.1016/0021-9169\(67\)90237-1](https://doi.org/https://doi.org/10.1016/0021-9169(67)90237-1), 1967.
- 460 Kirkman, J. R.: Point discharge in atmospheric electricity, PhD thesis, Durham University, <https://doi.org/http://etheses.dur.ac.uk/9188/>, 1956.
- Kirkman, J. R. and Chalmers, J. A.: Point discharge from an isolated point, *Journal of Atmospheric and Terrestrial Physics*, 10, 258–265, 1957.
- 465 Ksanfomality, L. V. et al.: The low-frequency electromagnetic field in the Venus atmosphere-evidence from VENERA-13 and VENERA-14, *Astron. Lett.*, 8, 230–232, 1982.
- Large, M. I. and Pierce, E. T.: The dependence of point-discharge currents on wind as examined by a new experimental approach, *Journal of Atmospheric and Terrestrial Physics*, 10, 251–257, [https://doi.org/https://doi.org/10.1016/0021-9169\(57\)90123-X](https://doi.org/https://doi.org/10.1016/0021-9169(57)90123-X), 1957.
- Le Monnier, L. G.: Observations sur l'Electricité de l'Air, *Histoire de l'Académie royale des sciences*, pp. 233–243, 1952.
- 470 Lorenz, R. D.: Discharge current measurements on Venera 13 & 14 – Evidence for charged aerosols in the Venus lower atmosphere?, *Icarus*, 307, 146–149, 2018.

- Lorenz, R. D., Neakrase, L. D. V., Anderson, J. P., Harrison, R. G., and Nicoll, K. A.: Point discharge current measurements beneath dust devils, *Journal of Atmospheric and Solar-Terrestrial Physics*, 150-151, 55–60, <https://doi.org/https://doi.org/10.1016/j.jastp.2016.10.017>, 2016.
- 475 MacGorman, D. R. and Rust, W. D.: *The Electrical Nature of Storms*, Oxford University Press, 1998.
- Marlton, G. J., Harrison, R. G., and Nicoll, K. A.: Note: Atmospheric point discharge current measurements using a temperature-compensated logarithmic current amplifier, *Review of Scientific Instruments*, 84, <https://doi.org/https://doi.org/10.1063/1.4810849>, 2013.
- Maund, J. E. and Chalmers, J. A.: Point-discharge currents from natural and artificial points, *Quarterly Journal of the Royal Meteorological Society*, 86, 85–90, <https://doi.org/https://doi.org/10.1002/qj.49708636707>, 1960.
- 480 Mazeas, G. and Parsons, J.: LVII. Observations upon the electricity of the air, made at the Chateau de Maintenon, during the months of June, July, and October, 1753; being part of a letter from the Abbé Mazeas, F. R. S. to the Rev. Stephen Hales, D. D. F. R. S. translated from the French by James Parsons, M. D. F. R. S, *Philosophical Transactions of the Royal Society of London*, 48, 377–384, <https://doi.org/https://10.1098/rstl.1753.0057>, 1753.
- McGinness, B., Harrison, R. G., Aplin, K. L., and Airey, M. W.: Evaluation of a modern point discharge sensor as an atmospheric electricity instrument, *Journal of Physics: Conference Series*, 2702, 012 004, <https://doi.org/https://doi.org/10.1088/1742-6596/2702/1/012004>, 2024.
- 485 Milner, J. W. and Chalmers, J. A.: Point discharge from natural and artificial points (Pt. II), *Quarterly Journal of the Royal Meteorological Society*, 87, 592–596, <https://doi.org/https://doi.org/10.1002/qj.49708737413>, 1961.
- Mulvey, G. J., Miller, J. F., and Moriarty, J. P.: Atmospheric Electrical Phenomena: A Pilot’s View, *Weatherwise*, 70, 32–39, <https://doi.org/https://doi.org/10.1080/00431672.2017.1346437>, 2017.
- 490 Nagamachi, S., Arita, S., and Hirota, E.: Historical data of atmospheric electric field observations in Japan, *Geoscience Data Journal*, 10, 45–62, <https://doi.org/https://doi.org/10.1002/gdj3.143>, 2023.
- Perkins, J. R.: Some General Remarks on Corona Discharges, in: *Engineering Dielectrics Volume I Corona Measurement and Interpretation*, ASTM International, <https://doi.org/10.1520/STP37821S>, 1979.
- Pliny the Elder: *The Natural History*, George Bell & Sons, translated by Bostock, J. and Riley, H. T., 77 [1855].
- 495 Ruhnke, L.: *Rocket Borne Instrument to Measure Electric Fields Inside Electrified Clouds*, 1973.
- Ruhnke, L. H.: A rocket borne instrument to measure electric fields inside electrified clouds, NOAA Technical Report, 1971.
- Schlegel, K.: Lightning and thunder explanations in encyclopedias - from ancient Greece to Wikipedia, *History of Geo- and Space Sciences*, 15, 71–80, <https://doi.org/https://doi.org/10.5194/hgss-15-71-2024>, 2024.
- Schonland, B. F. J. and Wilson, C. T. R.: The interchange of electricity between thunderclouds and the Earth, *Proceedings of the Royal Society of London. Series A, Containing Papers of a Mathematical and Physical Character*, 118, 252–262, <https://doi.org/https://doi.org/10.1098/rspa.1928.0049>, 1928.
- 500 Simpson, G. C.: XV. On the electricity of rain and its origin in thunderstroms, *Philosophical Transactions of the Royal Society of London. Series A, Containing Papers of a Mathematical or Physical Character*, 209, 379–413, <https://doi.org/https://doi.org/10.1098/rsta.1909.0015>, 1909.
- 505 Simpson, G. C.: Atmospheric Electricity, *Nature*, 90, 411–412, <https://doi.org/https://doi.org/10.1038/090411d0>, 1912.
- Simpson, G. C. and Robinson, G. D.: The distribution of electricity in thunderclouds, II, *Proceedings of the Royal Society of London. Series A. Mathematical and Physical Sciences*, 177, 281–329, <https://doi.org/https://doi.org/10.1098/rspa.1941.0013>, 1941.
- Simpson, G. C. and Scrase, F. J.: The distribution of electricity in thunderclouds, *Proceedings of the Royal Society of London. Series A - Mathematical and Physical Sciences*, 161, 309–352, <https://doi.org/https://doi.org/10.1098/rspa.1937.0148>, 1937.

- 510 Sukanjanajtee, P. and Aplin, K. L.: Electrostatic modelling of the Groza-2 discharge sensor on the Venera missions to Venus, *Journal of Physics: Conference Series*, 2702, 012 021, <https://doi.org/https://doi.org/10.1088/1742-6596/2702/1/012021>, 2024.
- Tripathi, S. N., Yadav, S., and Sharma, K.: Air pollution from biomass burning in India, *Environmental Research Letters*, 19, <https://doi.org/10.1088/1748-9326/ad4a90>, 2024.
- Van Doren, C.: Benjamin Franklin, Viking Press, 1938.
- 515 Von Engel, A.: Ionized gases, Oxford, Clarendon Press, 1965.
- Weber, M. E. and Few, A. A.: A balloon borne instrument to induce corona currents as a measure of electric fields in thunderclouds, *Geophysical Research Letters*, 5, 253–256, <https://doi.org/https://doi.org/10.1029/GL005i004p00253>, 1978.
- Weber, M. E., Stewart, M. F., and Few, A. A.: Corona point measurements in a thundercloud at Langmuir Laboratory, *Journal of Geophysical Research: Oceans*, 88, 3907–3910, <https://doi.org/https://doi.org/10.1029/JC088iC06p03907>, 1983.
- 520 Wescott, E. M., Sentman, D. D., Heavner, M. J., Hallinan, T. J., Hampton, D. L., and Osborne, D. L.: The optical spectrum of aircraft St. Elmo's fire, *Geophysical Research Letters*, 23, 3687–3690, <https://doi.org/https://doi.org/10.1029/96GL03621>, 1996.
- Whipple, F. J. W. and Scrase, F. J.: Point discharge in the electric field of the earth, an analysis of continuous records obtained at Kew observatory, H.M. Stationery Off., 1936.
- Williams, E. R.: The tripole structure of thunderstorms, *Journal of Geophysical Research: Atmospheres*, 94, 13 151–13 167, <https://doi.org/https://doi.org/10.1029/JD094iD11p13151>, 1989.
- 525 Williams, E. R.: C.T.R. Wilson versus G.C. Simpson: Fifty years of controversy in atmospheric electricity, *Atmospheric Research*, 91, 259–271, <https://doi.org/https://doi.org/10.1016/j.atmosres.2008.03.024>, 2009.
- Wilson, C. T. R.: On the ionisation of atmospheric air, *Proceedings of the Royal Society of London*, 68, 151–161, <https://doi.org/https://doi.org/10.1098/rspl.1901.0032>, 1901.
- 530 Wilson, C. T. R.: Atmospheric Electricity, *Nature*, 68, 102–104, <https://doi.org/https://doi.org/10.1038/068102d0>, 1903.
- Wilson, C. T. R.: On the Measurement of the Earth-Air Current and on the Origin of Atmospheric Electricity, *Proceedings of the Cambridge Philosophical Society*, pp. 363–382, 1906.
- Wilson, C. T. R.: On the measurement of the atmospheric electric potential gradient and the earth-air current, *Proceedings of the Royal Society of London. Series A, Containing Papers of a Mathematical and Physical Character*, 80, 537–547, <https://doi.org/https://doi.org/10.1098/rspa.1908.0048>, 1908.
- 535 Wilson, C. T. R.: III. Investigations on lightning discharges and on the electric field of thunderstorms, *Philosophical Transactions of the Royal Society of London. Series A, Containing Papers of a Mathematical or Physical Character*, 221, 73–115, <https://doi.org/https://doi.org/10.1098/rsta.1921.0003>, 1921.